


A3pci0104

PMC Carrier Board

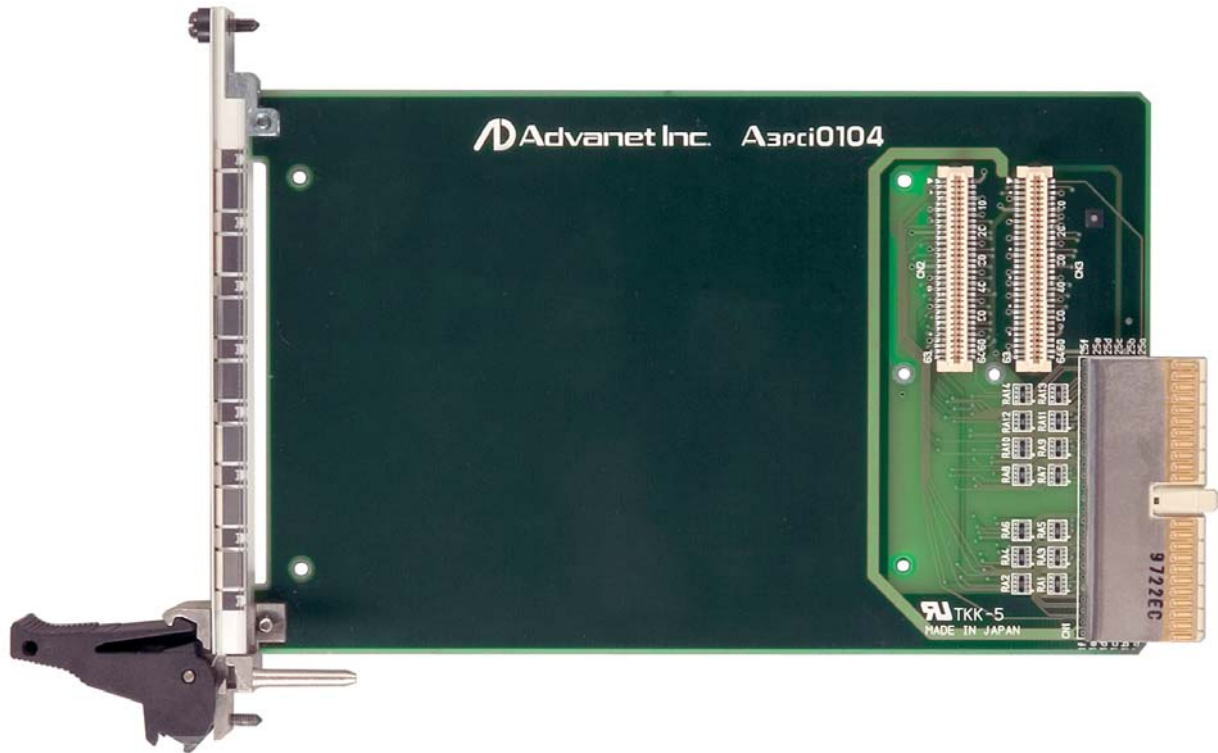

Features

- CompactPCI 6U-size PMC carrier board
- Two PMC slots; one for monarch mode (for PrPMC module only) and one for non-monarch mode
- Combine a PrPMC module with a PMC module to configure an intelligent-type peripheral slot board
- Onboard non-transparent PCI-PCI bus bridge (Intel21555 equivalent) for 64-bit 66MHz PCI bus support
- Front panel Ethernet and SIO connectors that support Adpmc7506 (G3/G4 PrPMC module) boards
- PMC board J4 connector signals can be wired to CompactPCI bus J3/J4 connectors (connectors are mounting options)

Specifications

- PCI bus
 - Signaling level: 5V/3.3V
 - Address bus width: 32/64 bits
 - Data bus width: 32/64 bits
 - Bus clock: 66MHz or less (33MHz or less when VIO is 5V)
- No. of PMC slots : 2 (one for monarch mode and one for non-monarch mode)
- Classification : Peripheral slot board
- Board size : 6U-size CompactPCI bus, Single slot width
- Weight : 275g



HUMAN ELECTRONICS

Advanet Inc.
www.advantec.co.jp

Note: The following specifications and product appearance are subject to change for enhancement without notice.


ISO9001
 Certification: No.4016-1995-AQ-K0B-Rv4

ISO14001
 Certification: No. EMSC-1426

Headquarters 616-4, Tanaka, Okayama 700-0951 JAPAN
 TEL +81-86-245-2861 FAX +81-86-245-2860

Tokyo Branch 3F, Hayakawa No.3 Building, 2-2Kanda-Tacho, Chiyoda-ku, Tokyo 101-0046 JAPAN
 TEL +81-3-5294-1731 FAX +81-3-5294-1734