


A3pci1550

4ch Serial Board

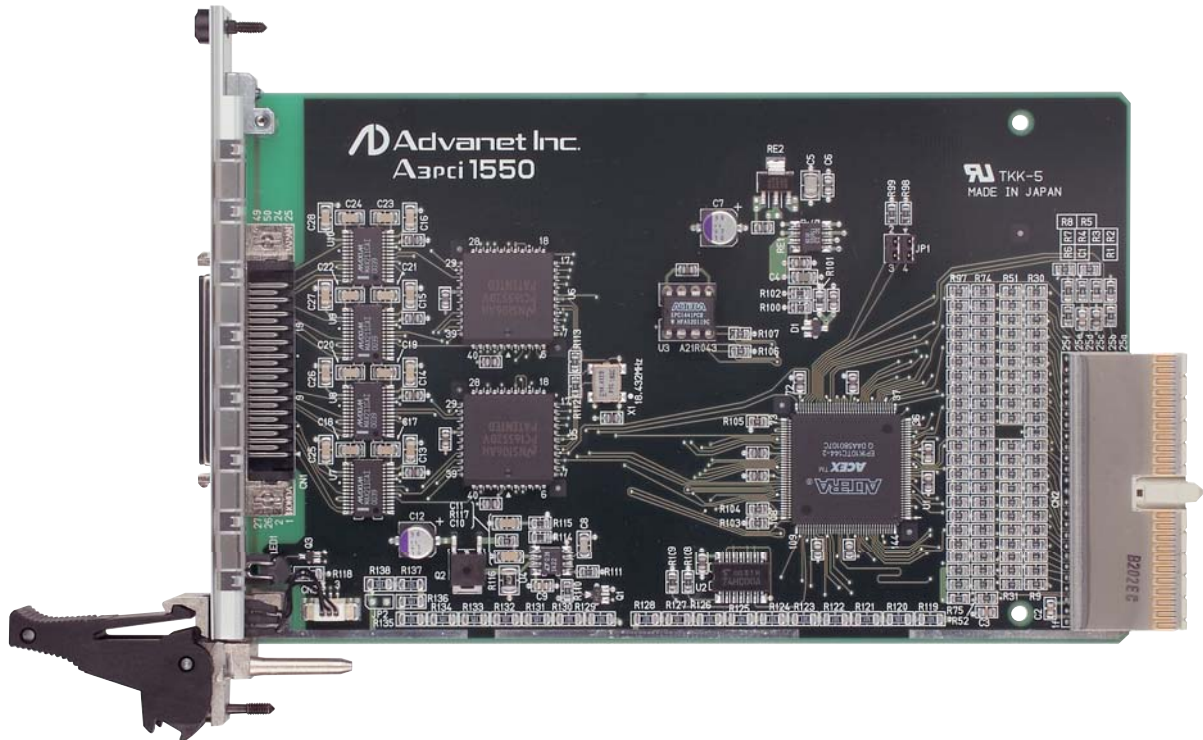

Features

- 4-channel serial interface board
- 3U size CompactPCI board
- Equipped with two National Semiconductor PC16552 serial controllers
- Half-pitch Dsub 50-pin female connector
- AP401 PC board for distributing four-channel signals from the main unit connector available as an option
- HotSwap capability: CPU board and backplane support HotSwap

Models

- A3pci1550:4-channel serial board
- A3pci1550-EXS:A3pci1550+cable(2m)+AP401(vertical connector)
- A3pci1550-EXR:A3pci1550+cable(2m)+AP401(horizontal connector)

Specifications

- No. of channels : 4 channels
- Communication system : Asynchronous
- Signal level : TIA/EIA-232E standard-compliant
- UART Two National Semiconductor PC16552DV UARTs, clk= 18.432MHz
- Baud rate : Up to 115.2kbps
- Connector : Half-pitch Dsub 50-pin female connector
- Control line : DCD, DSR, CTS, DTR, RTS, RI
- Bus : 32-bit CompactPCI interface
- Power requirements : DC5V ±5%
- Board size : 3U single slot width



HUMAN ELECTRONICS

Advanet Inc.

www.advanet.co.jp

Note: The following specifications and product appearance are subject to change for enhancement without notice.



ISO9001
Certification: No.4016-1995-AQ-KOB-Rv4

ISO14001
Certification: No. EMSC-1426

Headquarters 616-4, Tanaka, Okayama 700-0951 JAPAN
TEL +81-86-245-2861 FAX +81-86-245-2860
Tokyo Branch 3F, Hayakawa No.3 Building, 2-2Kanda-Tacho, Chiyoda-ku, Tokyo 101-0046 JAPAN
TEL +81-3-5294-1731 FAX +81-3-5294-1734