


www.advanet.co.jp CompactPCI series



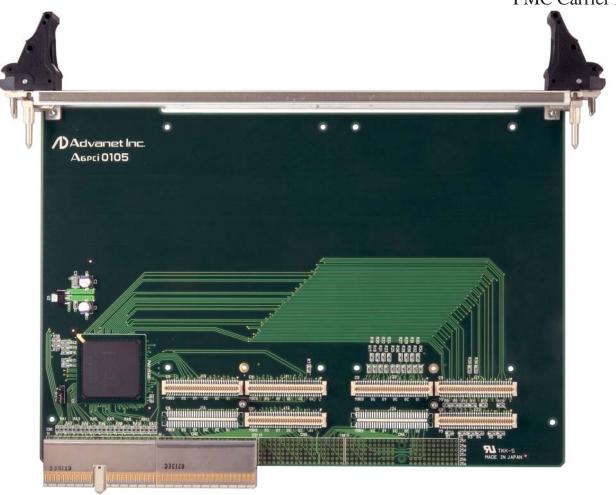

Features

Headquarters

Tokyo Branch

CompactPCI 6U-size PMC carrier board with two PMC slots Install a PMC module to use it as a 6U-size CompactPCI board For peripheral use only (cannot be equipped with a PrPMC module) Onboard transparent PCI-PCI bus bridge (Intel21154 equivalent) for 64-bit 66MHz PCI bus support

Specifications

PCI bus
Signaling level: (VIO) 5V/3.3V
Address bus width: 32/64 bits
Data bus width: 32/64 bits
Bus clock: 66MHz or less (33MHz or less when VIO is 5V)
No. of PMC slots : 2 (for non-monarch mode)
Classification : Peripheral slot board
Board size : 6U-size CompactPCI bus, Single slot width
Weight : 250g



Note: The following specifications and product appearance are subject to change for enhancement without notice.



