

Features

General Features:

- MPEG4 MULTIMEDIA DATA DECODING AND CONTENT STREAMING
- 10/100 Mbit ETHERNET OR WI-FI INTERFACE
- CF-CARD FOR LOCAL PLAYBACK DATA STORAGE
- STANDARD OR HIGH DEFINITION VIDEO OUTPUT



Applications:

- INFOTAINMENT
- DIGITAL SIGNAGE

- Ideal solution for **distributed video and digital signage** applications
- **Advanced MPEG-4/MPEG-2 decompression technology** for enhanced video and audio capabilities
- **Play** streaming video or locally stored data at scheduled or event-triggered rotation
- **Easy-to-use browser interface** for configuration and setup
- **Wireless capability**
- Interface with multiple netCast Player II units or netCast products in a **customizable configuration**

Use the best Video over IP (VIP) solution for entertainment, digital signage, and security applications with the netCast Player. The netCast Player converts a digital video stream to NTSC or PAL analog video and stereo audio outputs.

A built-in Compact Flash card interface supports recording video streams to a CF card. The netCast Player is ideal for distributed video and digital signage because it can transmit video anywhere to multiple clients easily and cost-efficiently. Furthermore, it is configured and managed using HTTP and an Internet browser.

Built-in programmable timers support time event triggered video recording. netCast Player can be supported either as a stand-alone unit or configured to work with other netCast products.

The netCast Server is a Windows application that automatically detects all netCast Player units on a subnet as well as all video content stored locally or on a hard disk. It works with netCast Player to allow the digitized video to be streamed to one or more Player units and stream or download different files to specific units. The netCast Server application also provides an easy interface for scheduling content according to day, time, or even specific events. Whether as a stand-alone unit or in conjunction with the netCast suite of products, netCast Player is the ideal solution for entertainment and digital signage applications.


PLAYER VIP

Specifications

PROCESSOR	MIPS CPU with Sunplus MPEG-4/MPEG-2 decoding engine
MEMORY	32 MB DRAM
MEDIA SOURCE	10/100Mbit Ethernet 802.11 Wi-Fi CF-card slot
DECODING	MPEG-4/MPEG-2
VIDEO OUT	NTSC/PAL composite video output
AUDIO	Stereo Output
I/O	USB 1.1 host port RS-232 serial port Compact Flash (Type II) slot 10/100 Mbit Ethernet Status LEDS
WLAN	IEEE 802.11 b/g (optional)
OTHER	Browser-accessed video control
POWER	12 VDC
OPERATING TEMPERATURE	0° to +60°C (+32° to +140°F)
STORAGE TEMPERATURE	-20° to +70°C (-4° to +158°F)
HUMIDITY	20% to 80%
COMPLIANCE	CE FCC
DIMENSIONS	140x105 mm (5.5" x 4.1")
WEIGHT (APPROXIMATE)	350g

PERIPHERALS & ACCESSORIES

Power Supply 110-240Vac 50÷60 Hz input and 12VDC output

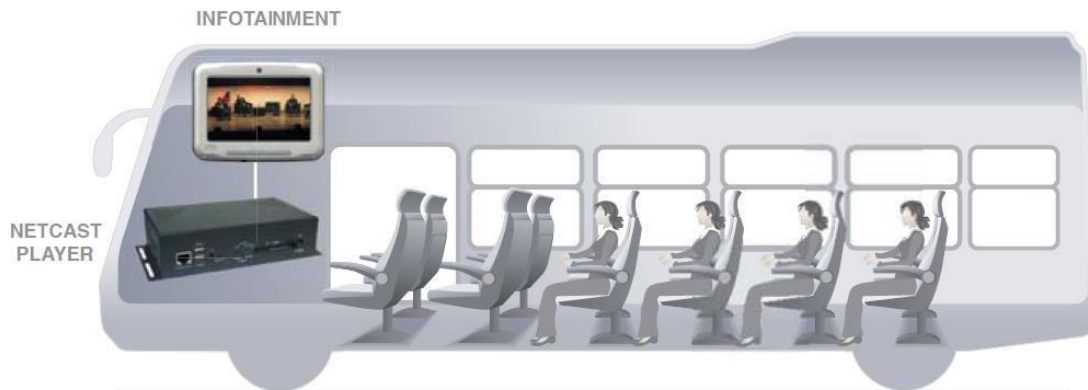

Note: The information in this document is subject to change without notice and should not be construed as a commitment by Eurotech. While reasonable precautions have been taken, Eurotech assumes no responsibility for any errors that may appear in this document. Product images are indicative and may differ from the final product. All trademarks or registered trademarks are the properties of their respective companies.

Americas

EUROTECH Inc
e-mail: sales-us@eurotech.com
tel: +1 301.490.4007
toll free: +1 888.941.2224

Western Europe

EUROTECH UK
e-mail: sales-uk@eurotech.com
tel: +44 (0) 1223 403.410

EUROTECH France
e-mail: sales-fr@eurotech.com
tel: +33 04.72.89.00.90

Central & Southern Europe

EUROTECH Italy
e-mail: sales-it@eurotech.com
tel: +39 0433.485.411

Northern & Eastern Europe

EUROTECH Finland
e-mail: sales-fi@eurotech.com
tel: +358 9.477.888.0